

LT-3060S LED CV Power Repeater



FC CE RoHS

warranty
5 years



LED Power Repeater is suitable for all of our company's power-output style controllers' power expansion, it accepts PWM control, the control quantity of LED lights would be twice as much by adding one more power repeater, unlimited quantity of power repeater to be connected theoretically.


1. Technical specs:

LT-3060S (common anode)


Input signal:	PWM (200Hz~2000Hz)	Working temperature:	-30°C~55°C
Input voltage:	5~24Vdc	Dimensions:	L121×W39×H39(mm)
Current load:	5A × 3CH Max. 15A	Package size:	L123×W42×H42(mm)
Output power:	(0~25W...120W) × 3CH Max. 360W	Weight(G.W.):	210g
Protection:	Over current / Short circuit / Reverse connection protection		

2. Product size:

Unit: mm

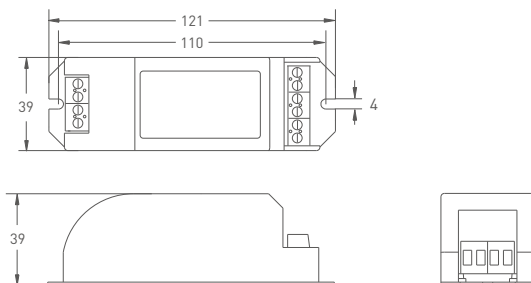


3. Terminal description:

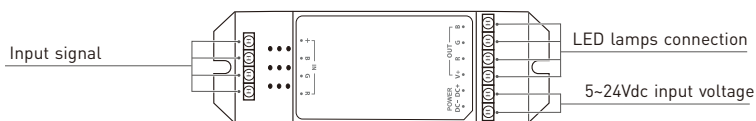

4. Wiring diagram:

12V lamp connected, loads 0~180W(12V);
24V lamp connected, loads 0~360W(24V).

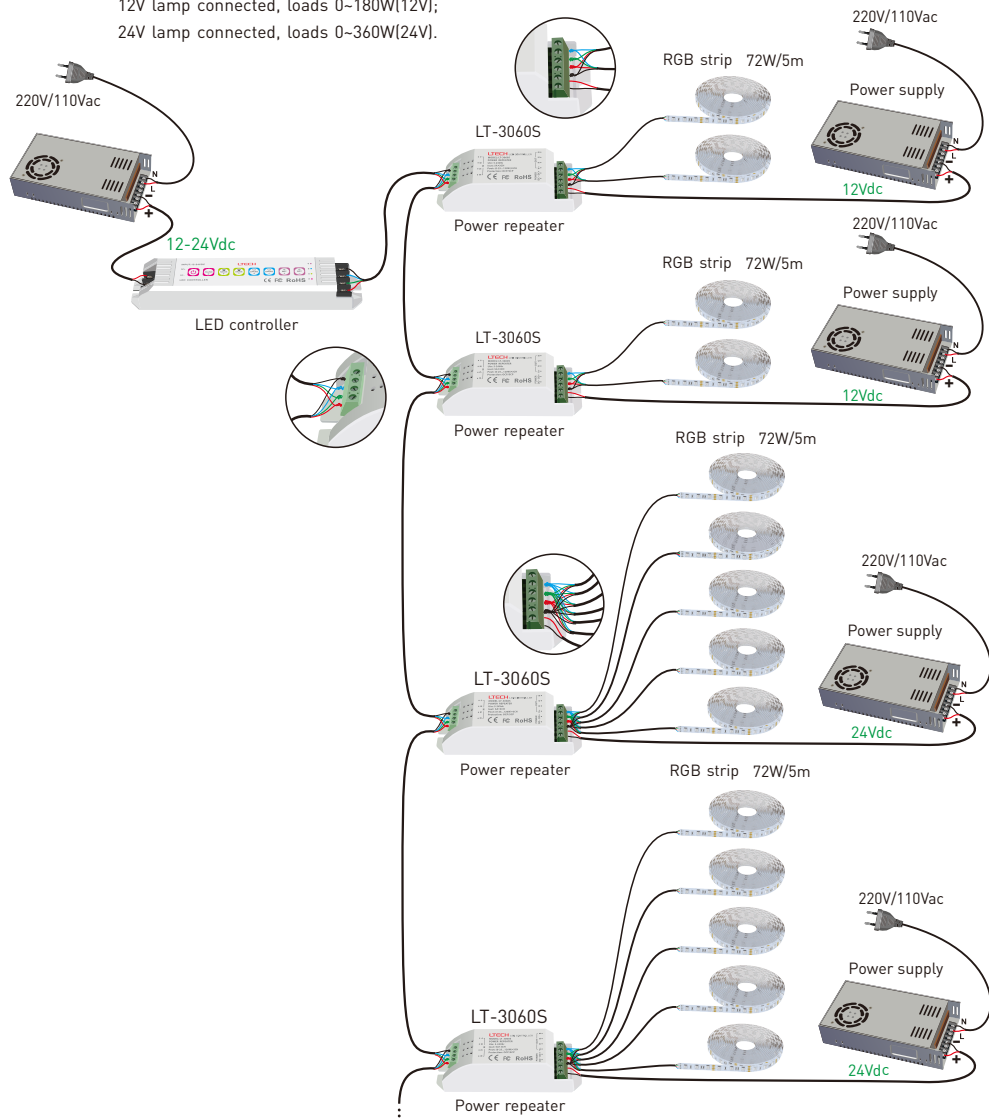

* No further notice if any changes in the manual. Product function depends on the goods. Please feel free to contact your supplier if any question.

LT-3060S
LED恒压功率扩展器



FC CE RoHS (质保5年) ISO9001:2008

LED功率扩展器适用于我公司所有功率型LED控制器的功率放大, 功率扩展器可接受PWM(脉宽调制)控制, 每增加一个功率扩展器就可以多连接一倍或3倍的LED灯数量, 理论上可以连接无限多个功率扩展器。


一 性能参数：

LT-3060S (共阳极)

输入信号：	PWM (200Hz~2000Hz)	工作温度：	-30℃~55℃
输入电压：	5~24Vdc	产品尺寸：	L121×W39×H39(mm)
最大负载电流：	5A × 3CH Max.15A	包装尺寸：	L123×W42×H42(mm)
输出功率：	[0~25W...120W] × 3CH Max. 360W	重量(毛重)：	210克
保护：	短路、过流、防反接保护		

二 外型尺寸：

单位：mm

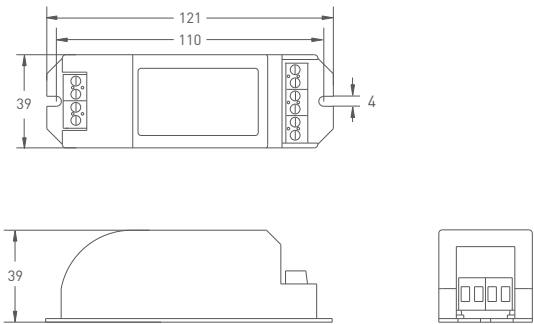


三 端子描述:



四 连线示意图:

连接12V灯条, 可负载 0~180W(12V);
连接24V灯条, 可负载 0~360W(24V).

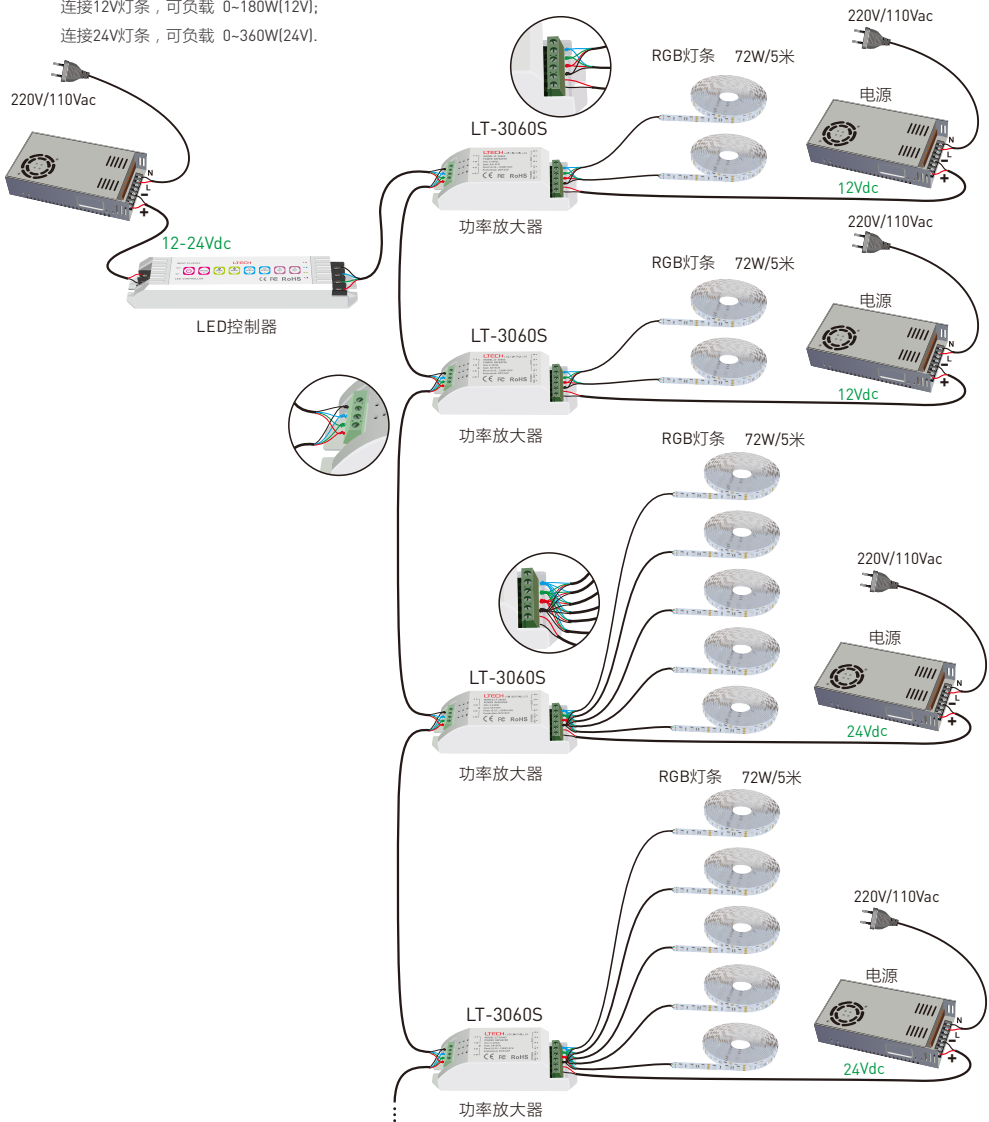

* 本说明书的内容如有变更, 恕不另行通知。若内容与您使用的功能有所不同, 则以实物为准。如有疑问, 请与供应商联系。