

LTECH

DMX512 DECODER


LT-912

12
CHANNELS

8 bit / 16 bit

3 kinds of DMX interfaces

Short circuit / Over current / Overheat protection

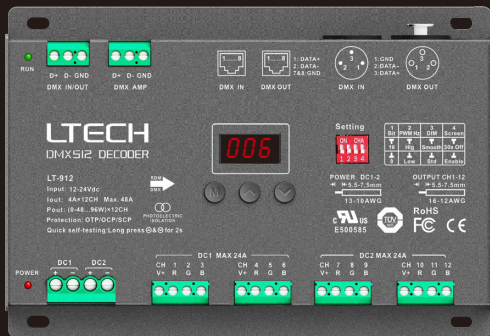

www.ltech-led.com

Product introduction

1. Designed for Hi-power multiple channels application, 12 channels output, and up to 1152W output power.
2. Easy operation with digital display and the touch buttons.
3. 3-pin XLR, RJ45 and green terminal DMX interface with photoelectric isolation, improve signal transmission efficiency and anti-interference ability, the green terminal also has signal amplifier function.
4. With RDM remote management protocol, the operations can be completed via the RDM master console, such as parameters browsing & settings, DMX address settings, equipment recognition, etc.
5. With firmware upgrade function.
6. With short circuit / overheat / over current protection, as well as warning function when a fault occurs.
7. With power-on state management and fast self-testing function.
8. High/low PWM frequency available.
9. 16bit (65536 levels) / 8bit (256 levels) grey level available.



3-pin XLR



RJ45

Photoelectric
isolation

RDM


Short circuit
protectionOverheat
protectionOver current
protection

Technical specs


Model :	LT-912
Input signal :	DMX512/RDM
DMX interfaces :	3-pin XLR, RJ45, green terminal
Input voltage :	12~24Vdc
Current load :	4A × 12CH Max. 48A
Output power :	[0~48W...96W] × 12CH Max. 1152W
Grey level :	8bit (256 levels) / 16bit (65536 levels)
Photoelectric isolation :	Yes
Protection :	Short circuit / Overheat / Over current protection, recover automatically.
Working temperature :	-30°C~65°C
Dimensions :	180×122×39mm(L×W×H)
Package size :	193×127×41mm(L×W×H)
Weight (G.W.) :	730g

Product size

Unit: mm

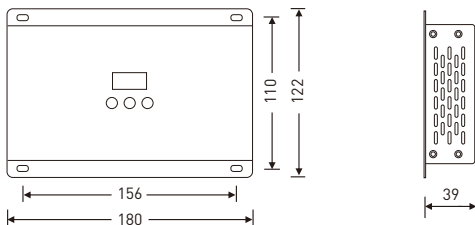

Main component description

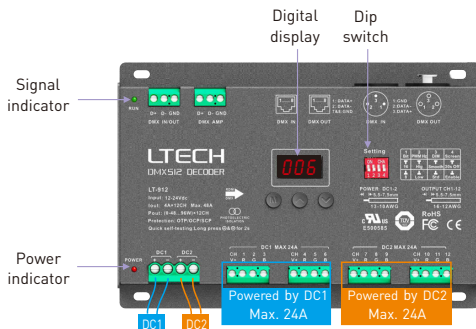

Digital display




- Digital display will enter the locked mode without operating after 15S.
- Long press "M" key to unlock.
- Short press "M" key to switch numbers.
- Press " $\wedge$ " "v" key to adjust value.

DIP switch




1 Bit	2 PWM Hz	3 DIM	4 Screen
 16	 High	 Smooth	 30S off
 8	 Low	 Std	 Enable

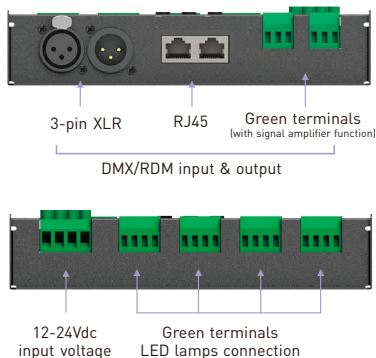




Wiring diagram

1. DMX console connection:

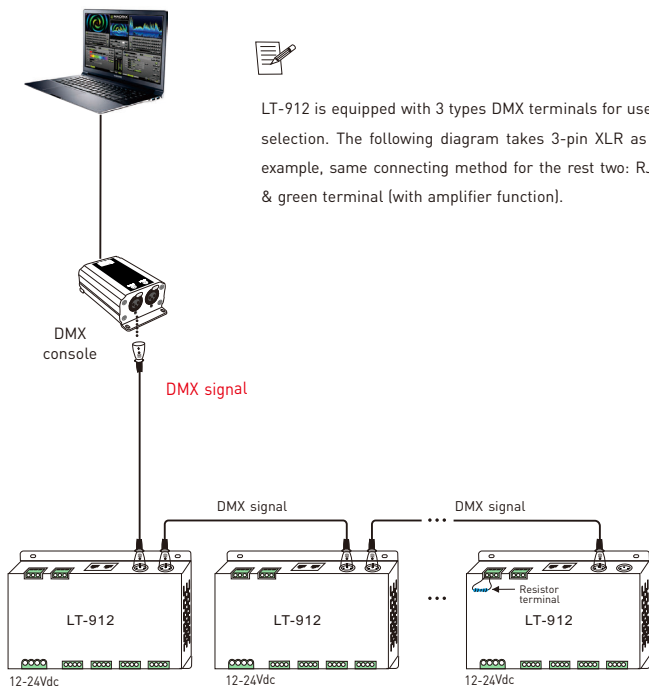


* If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each line.


2 Connecting LED lights:

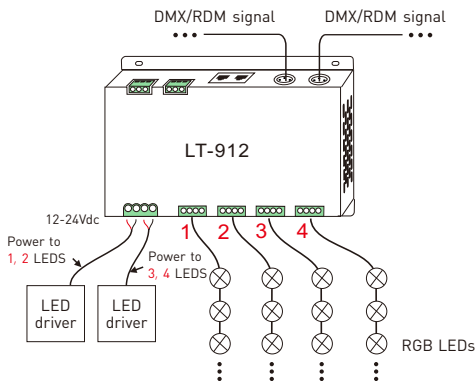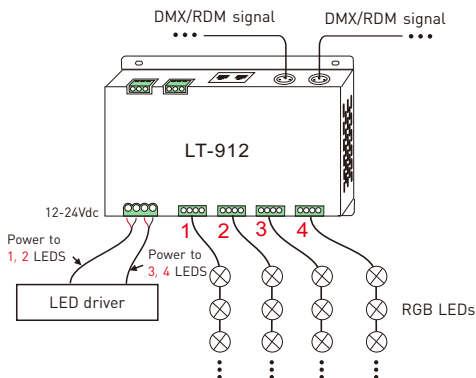


3. The connection diagram of 3 kinds of DMX/RDM terminals:

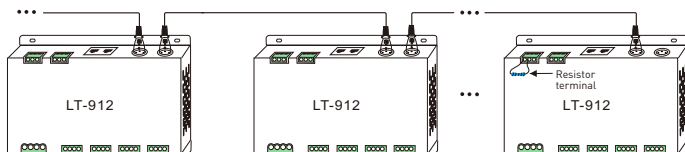

3-pin XLR connected in parallel

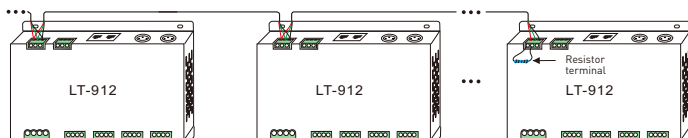

Green terminal connected in parallel

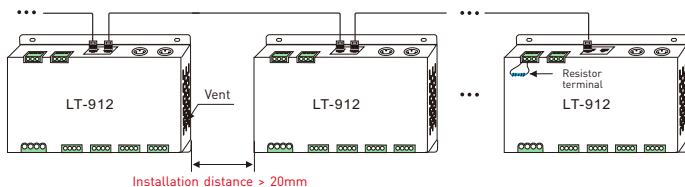


RJ45 connected in parallel

These 3 terminals can be connected in a mixed way.

*** Installation attentions :** please reserve enough ventilation distance between decoders (>20mm), be sure not to block the vent, or it will affect lifetime of decoder for poor heat dissipation.


4. The connection diagram of AMP signal amplifier terminal:

- * Connecting with green terminal or an extra amplifier will be needed when more than 32 decoders are connected or use overlong signal wire(as shown below).
Signal amplifier should not be more than 5 times continuously.

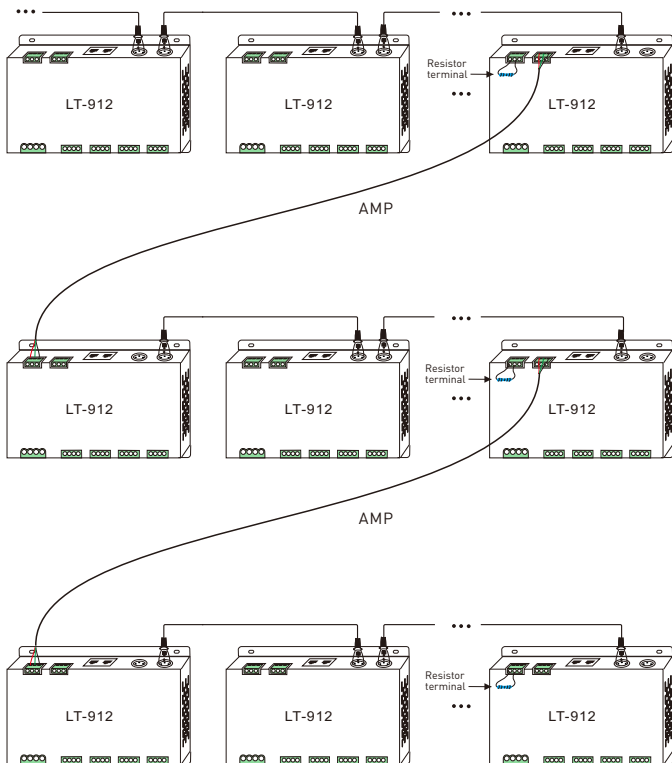

Work with RDM editor


LT-912 can work with LTECH RDM editor (Model: WiFi-RDM01) to realize changing the parameters and firmware upgrade by long-range setting, wiring diagram as below:

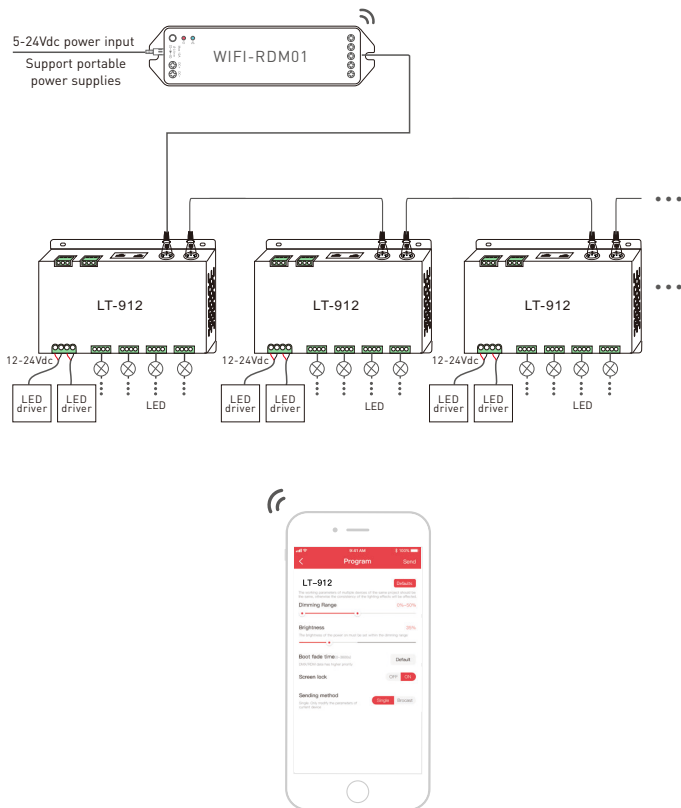

RDM editor App interface instructions

Download the App, setting LT-912 parameters (dimming range, brightness, boot fade time etc.) after well connecting the RDM editor, more details, please check the manual of WiFi-RDM01.

Well installation of products first, then working with WiFi -RDM01 to realize setting parameters and firmware upgrade by App.

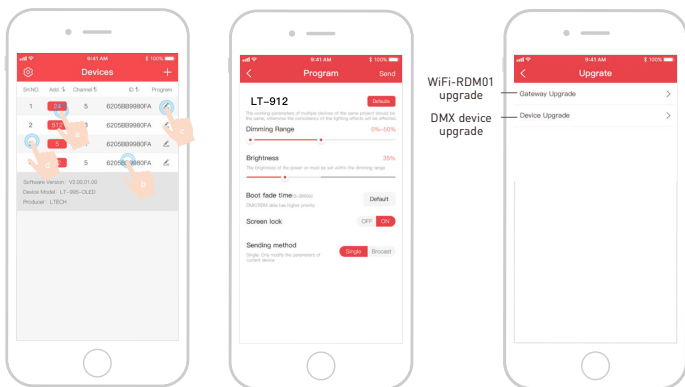

- a: Click "Add", edit the address in corresponding box.
 b: Click "ID", get more product details.
 c: Click "🔧", enter editing interface.
 d: Click "No.", issue the recognizing command.

WiFi-RDM01
upgrade
DMX device
upgrade

Supporting WiFi-RDM01 upgrade
and DMX driver upgrade.

Attentions

1. The product shall be installed and serviced by the qualified person.
2. This product is non-waterproof. Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
3. Good heat dissipation will prolong the working life of the controller. Please ensure good ventilation.
4. Please check if the output voltage of the LED power supply used comply with the working voltage of the product.
5. Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.
6. Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.
7. If a fault occurs, please return the product to your supplier. Do not attempt to fix this product by yourself.

* This manual is subject to changes without further notice. Product functions depend on the goods.
Please feel free to contact our official distributors if you have any question.

Warranty agreement

Warranty periods from the date of delivery : 5 years.

Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
 - Any artificial damage caused by high voltage, overload, or improper operations.
 - Products with severe physical damage.
 - Damage caused by natural disasters and force majeure.
 - Warranty labels and barcodes have been damaged.
 - No any contract signed by LTECH.
1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
 2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.

LTECH 雷特

DMX512 DECODER

LT-912

12

CHANNELS


8 bit / 16 bit

3种DMX接口

短路、过温、过流保护



光电隔离

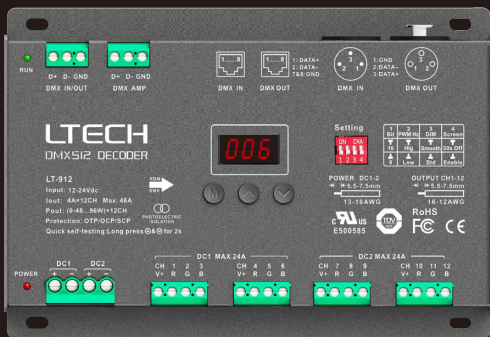

www.ltech.cn

产品介绍:

- 1、本产品为大功率多通道应用而设计，共有12个通道输出，总功率可高达 1152W。
- 2、使用数码管和轻触按键设置地址，操作简单快捷。
- 3、提供3针XLR、绿色端子、RJ45三种具有光电信号隔离功能的DMX接口，提高信号传输效率和抗干扰能力，其中绿色端子还有信号放大功能。
- 4、具有RDM远程管理协议，通过RDM主控可对其进行参数浏览与设置、DMX地址修改、设备识别等操作。
- 5、具有固件升级功能。
- 6、具有短路、过温、过流自动保护与恢复功能，并有故障警示提示功能。
- 7、具有上电状态管理及快速自测功能。
- 8、PWM频率可选高频/低频。
- 9、16bit (65536级)/8bit (256级) 灰度级可选。



3针XLR



RJ45



RDM



光电隔离



短路保护



过流保护




过温保护


性能参数:

产品型号:	LT-912
信号输入:	DMX512/RDM
DMX接口:	3针XLR, RJ45, 绿色端子
输入电压:	12- 24Vdc
负载电流:	4A×12路 Max. 48A
输出功率:	(0~48W...96W)×12路 Max. 1152W
灰度等级:	8bit(256级)/16bit(65536级)可选
光电隔离:	有
保护:	短路、过温、过流保护, 可自动恢复
工作温度:	-30°C~65°C
产品尺寸:	L180×W122×H39mm
包装尺寸:	L193×W127×H41mm
重量(毛重):	730g

单位: mm

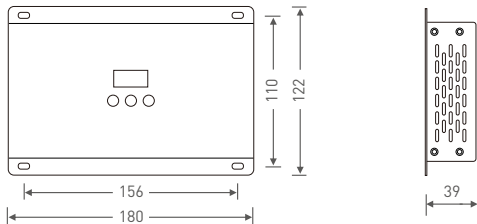

部件图:

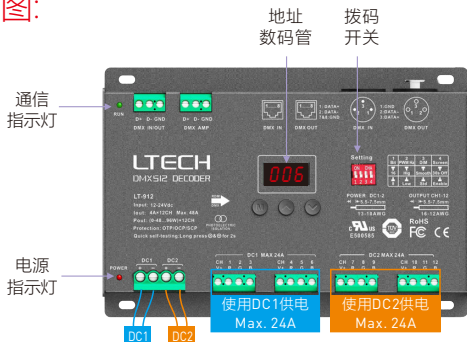

地址数码管





- 数码管不使用15秒将进入锁定状态
- 长按“M”键解锁
- 短按“M”键切换至另一数字
- 按“^”“v”键调整数值

拨码开关




1	2	3	4
灰度级	PWM Hz	调光	显示
16	高	平滑	30秒后关
8	低	标准	开

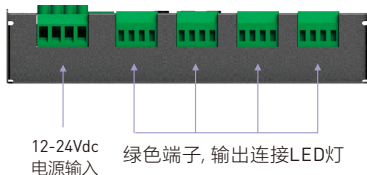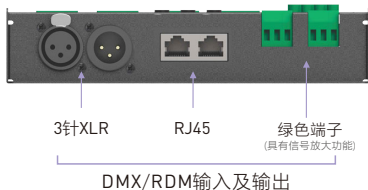




连接示意图:

1. DMX系统连接

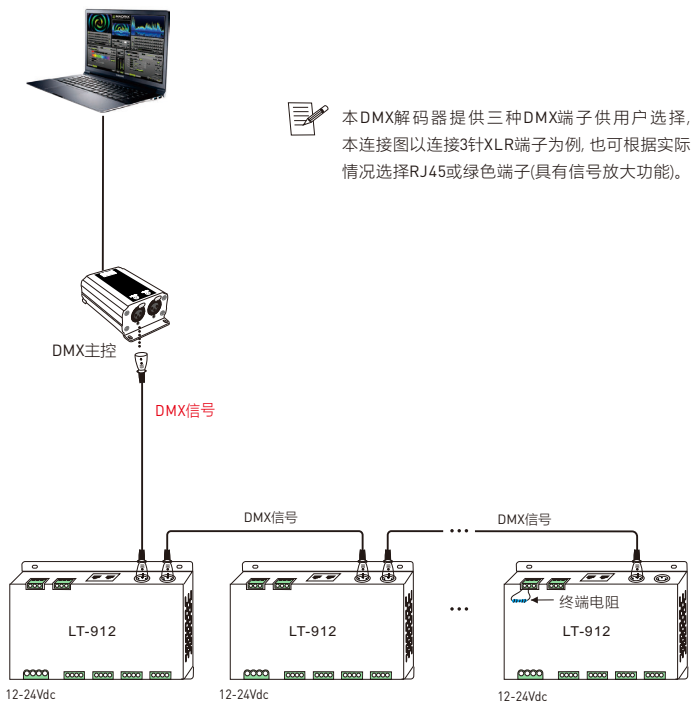


* 当信号线较长或者线材质量等原因造成信号反冲效应影响使用, 可以尝试在每路信号线末端连接0.25W 90-120Ω终端电阻解决。


2. 连接LED灯

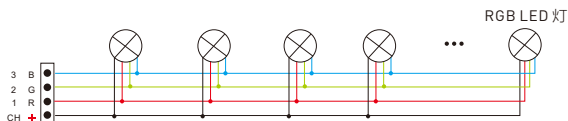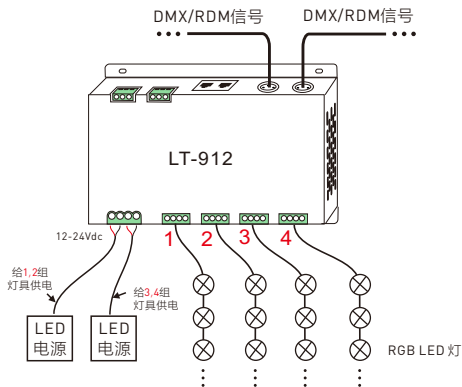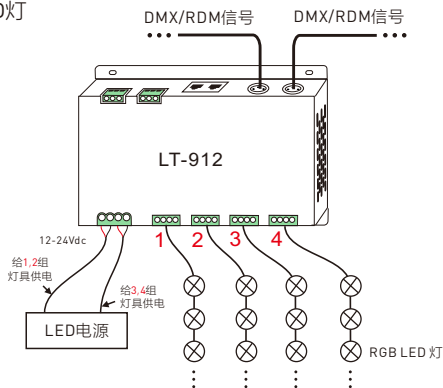


3 三种DMX端口的连接示意图

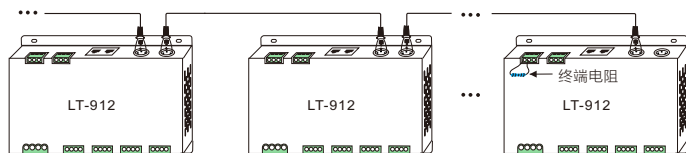

3针XLR并联连接

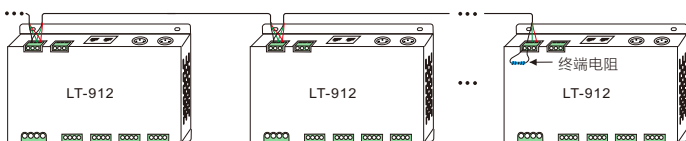

绿色端子并联连接

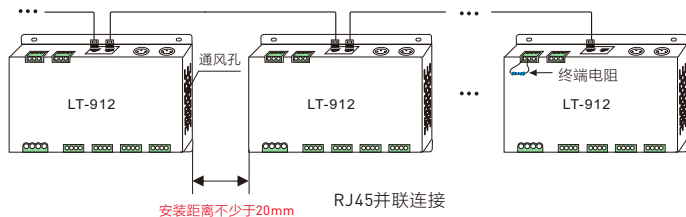

RJ45并联连接


安装距离不少于20mm

以上三种方式可以任意混合连接

*** 安装注意事项：**请在解码器与解码器之间预留通风距离（最少20mm），切勿堵塞通风孔，否则会因设备散热不畅影响使用寿命。


4 AMP信号放大端子连接图

* 当DMX解码器过多(超过32台),或信号线过长,需加信号放大器或使用绿色端子接口进行信号放大(见下图),信号放大不能连续超过5次。

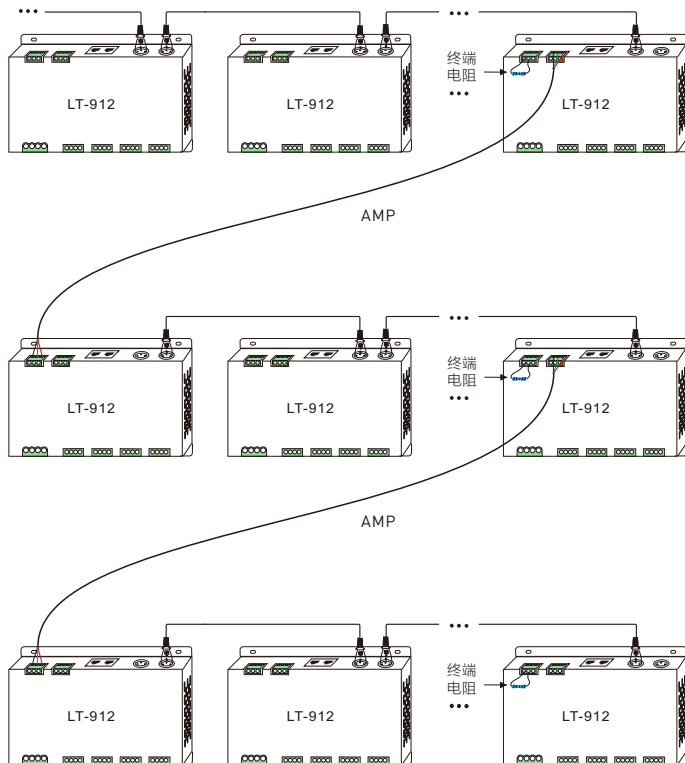

与RDM编辑器配合使用:


LT-912可以与我司RDM编辑器（型号WiFi-RDM01）配合使用，以实现手机远程浏览与设置参数、固件升级等，连接图如下:

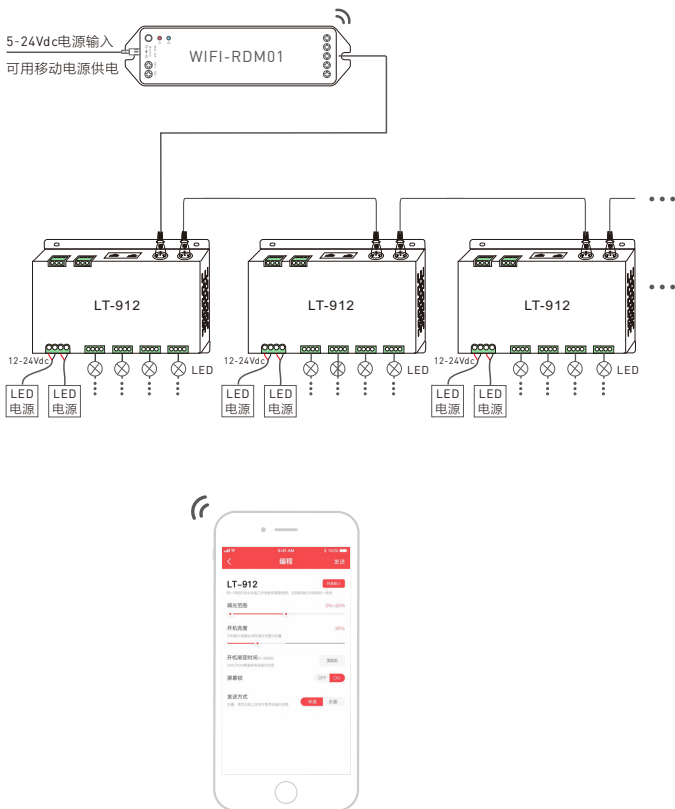

RDM编程器APP界面介绍:

手机下载APP，与RDM编辑器连接成功后，即可通过APP设置LT-912的调光范围、开机亮度、开机渐变时间等参数，具体请参看WiFi-RDM01的使用说明书。

配套使用WiFi-RDM01后，即可实现先安装再用APP设置参数及进行固件升级，随心更改，免高空作业。

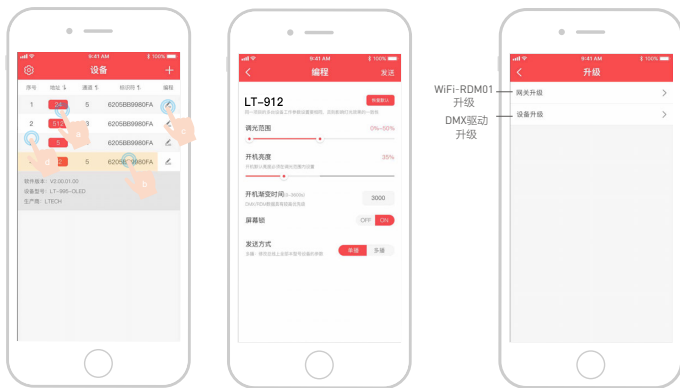

- a: 点击“地址”对应方框可编辑地址；
- b: 点击“标识符”出现产品详细信息；
- c: 点击编程按钮“”则进入编辑界面；
- d: 点击序号发出识别命令。

在APP进行固件升级

注意事项:

- 1、本产品请由具有专业资格的人员进行调试安装。
 - 2、本产品不能防水，需避免日晒雨淋，如安装在户外，请用防水箱。
 - 3、良好的散热条件会延长LED控制器的使用寿命，请把产品安装在通风良好的环境。
 - 4、请检查使用的LED电源输出电压是否符合产品电压范围要求。
 - 5、使用的电线直径大小必须能足够负载连接的LED灯具，并确保接线牢固。
 - 6、通电调试前，应确保所有接线正确，以避免因接线错误而导致灯具损坏。
 - 7、如果发生故障，请勿私自维修；如有疑问，请联系供应商。
- * 本说明书的内容如有变更，恕不另行通知。若内容与您使用的功能有所不同，则以实物为准。
如有疑问，欢迎向我司授权的经销商咨询。

保修条例

- 自出厂之日起保修服务期为5年。
- 在保修服务期内出现产品质量问题雷特将给予免费修理或更换服务。

非保修条例:

属下列情况不在免费保修或更换服务范围之内:

- 已经超出保修服务期;
 - 过高电压、超负载、操作不当等人为造成的损坏;
 - 产品外形严重损坏或变形;
 - 自然灾害以及人力不可抗拒原因造成的损坏;
 - 产品保修标签和产品唯一条形码损坏;
 - 无雷特签订的合同或发票凭证。
1. 修理或更换是雷特对客户的唯一补救措施。雷特不承担任何附带引起的损害赔偿 responsibility, 除非在适用法律范围之内。
 2. 雷特享有修正或调整本保修条款的权利, 并以书面形式发布为准。